


型号表示方法



REKKP快速排气阀, 公称通径为6mm, 定货型号为REKKP-L6; REKKP快速排气阀, 公称通径为20mm, 定货型号为REKKP-20

符号




标准规格

型号	REKKP-L6	REKKP-L8	REKKP-L10	REKKP-L15	REKKP-L20	REKKP-L25	REKKP-L32	REKKP-L40	REKKP-L50
公称通径 mm	6	8	10	15	20	25	32	40	50
工作介质	压缩空气								
工作压力范围 Mpa	0.12~0.8								
介质温度 °C	5~50								
环境温度 °C	5~50								
有效截面积	P→A: 10	20	40	60	110	190	300	400	650
	A→O: 20	40	60	110	190	300	400	650	900
泄漏量 ≤cm ³ /min	50		100		200		300		900
换向时间 ≤s	0.03		0.04		0.05		0.06		50
耐久性 ≥万次	200		150		50				

外形尺寸图(毫米)

REKKP06-15

REKKP20-50

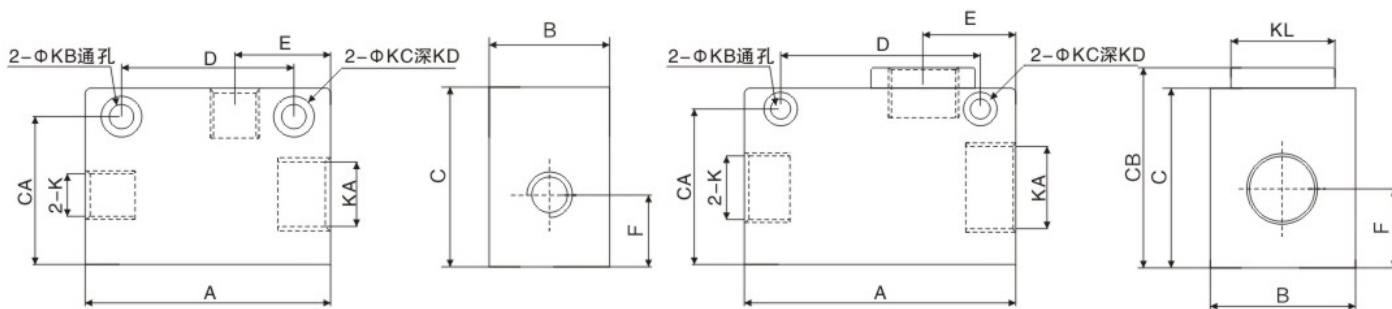

型号	A	B	C	D	E	F	CA	CB	K	KA	KB	KC	KD	KL
REKKP-L6	58	30	45	33	25	15	37		G1/8	G1/4	5.2	8.5	5	
REKKP-L8	58	30	45	33	25	15	37		G1/4	G3/8	5.2	8.5	5	
REKKP-L10	70	34	50	49	27	20	42		G3/8	G1/2	7.2	11.5	7	
REKKP-L15	80	43	59	54.5	32	22.5	49		G1/2	G3/4	7.2	11.5	8.5	
REKKP-L20	130	70	85	95.5	45	37	75	95.5	G3/4	G1	11	16	11	50
REKKP-L25	156	70	85	95.5	45	37	75	95.5	G1	G1 1/4	11	16	11	50
REKKP-L32	156	90	101.5	125	53	43.5	88	111	G1 1/4	G1 1/4	11.5	17	11.5	68
REKKP-L40	156	90	101.5	125	53	43.5	88	111	G1 1/2	G1 1/2	11.5	17	11.5	68
REKKP-L50	156	90	101.5	125	53	43.5	88	111	G2	G2	11.5	17	11.5	68